

NEVERGOFLAT™

Quick Start Guide



TECH SPECS

Model: BBF-NGF4-001

Battery Capacity: 4,000mAh | 3.7V

Recharging Time (From 0%): 3 Hours

Battery Level Display: 5 battery bars

Type-C Input: 5V/2A (Max)

USB Output: 5V/2.4A (Max)

Max Operating Pressure: 120 PSI / 8.3 BAR

Max Instant Pressure: 150 PSI / 10.3 BAR

Air Pressure Range: 3-150 PSI / 0.2-10.3 BAR

Range Resolution: 1 PSI / 0.1 BAR

Air Pressure Tolerance: ±1.5%

Product Working Temperature: 32°-104°F (0°-40°C)

Charge Operating Temperature: 32°-113°F (0°-45°C)

Discharging Operating Temperature:

14°-140°F (-10°-60°C)

Flashlight: 25 Lumens

Flashlight Modes: On | S.O.S. | Strobe

Floodlight: 150 Lumens

Floodlight Modes: On | Red & White Flashing |

White Flashing | Red Flashing

Dimensions: 6.1" x 4.53" x 4.53"

Weight: 1.76 lb

WHAT'S INCLUDED

- A. (1) NEVERGOFLAT™
- B. (1) Storage Bag
- C. (1) 24" Type-C Charging Cable
- D. (1) 1-Port USB Car Charger
- E. (1) 36" Hose w/Air Chuck
- F. (1) Inflatable Air Nozzle
- G. (1) Ball Pump Needle
- H. (1) Presta Valve




COMPONENTS

- 1. Faux Leather Handle
- 2. USB Output
- 3. Flashlight
- 4. Type-C Input
- 5. Adapter Storage Door
- 6. Adapter Storage Slot
- 7. Exhaust
- 8. Retractable Hose w/Air Chuck
- 9. Control Panel
- 10. Battery Level Indicator
- 11. Air Compressor Mode
- 12. Digital Display
- 13. Unit of Measurement
- 14. Emergency Floodlight/Red Flashing



ADAPTER COMPATIBILITY

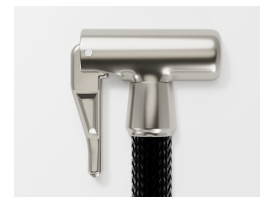

Air Chuck

Cars, Trucks, Trailers, ATVs, Motorcycle Tires & more.



Inflatable Air Nozzle

Pool Tubes, Floats, Balloons, Toys, etc.



Ball Pump Needle

Basketballs, Soccer Balls, Footballs, Volleyballs, etc.



Presta Valve

Bicycle Tires

NEVERGOFLAT™

All rights reserved. NEVERGOFLAT™ is a trademark of Built by Failure, Inc. Design and specifications subject to change without notice. Products may vary from images shown.

Powered By:

LIMITLESS

Support@LimitlessInnovations.com

Limitless Innovations, Inc.
4800 Metalmaster Way
McHenry, IL 60050

Designed & Innovated in USA
Made in China

CONTROL PANEL

 **Press:** Power Unit On or Off
Press & Hold (2 Seconds): Activate Air Compressor

 **Press:** Switch Pump Modes
Press & Hold (2 Seconds): Switch PSI / BAR / kPa

 **Press:** Increase 1 PSI / 0.1 BAR / 10 kPa
Press & Hold: Continual Increase Until Released

 **Press:** Decrease 1 PSI / 0.1 BAR / 10 kPa
Press & Hold: Continual Decrease Until Released

 **Press:** Turn On, Cycle Through Light Modes, Turn Off
Press & Hold (2 Seconds): Turn Off Without Cycling Through the Light Modes

 **Press:** Turn On, Cycle Through Light Modes, Turn Off
Press & Hold (2 Seconds): Turn Off Without Cycling Through the Light Modes

HOW TO USE

Powering On The NEVERGOFLAT™
Press the AIR button to turn on. The Car icon, Default PSI and Battery Indicator will illuminate on the top Display. The Display will read “0” if nothing is attached. The default unit of measurement is set to PSI.

Note:
The NEVERGOFLAT™ will automatically shut off after being idle for 60 seconds.

Understanding the 5 modes
The NEVERGOFLAT™ comes with 5 modes for user convenience: Car, Motorcycle, Bike, Ball and Custom modes. The Car, Motorcycle, Bike, Ball modes are set to standardized defaults (right) and will reset to their default upon cycling through modes or turning the unit off and on. The Custom Setting (gear icon) is for the user to save a desired PSI / BAR / kPa.

Note:
Always refer to the manufacturer’s recommended PSI / BAR / kPa level for the item being inflated.

Adjusting The Modes
Use the SET, +, and – buttons to adjust the PSI/BAR/kPa settings to the desired level. Refer to the Control Panel instructions (left) and the default settings (right).




DEFAULT SETTINGS				
MODE		PSI	BAR	kPa
	Car	36	2.5	250
	Motorcycle	36	2.5	250
	Bike	60	4.1	410
	Ball	8	0.5	50
	Custom	User Defined		


Accessing The Air Hose
The Air Hose is stored in the base of the NEVERGOFLAT™.

How to Open/Unlock
1. Press down the Base Cover.
2. Turn counterclockwise to the position so that the Unlock icons are aligned and the Base cover can be easily put away.


How to Close/Lock
1. Place the Air Hose into the Storage Compartment.
2. Make sure to align the Unlock Icons.
3. Press down the Base Cover.
4. Turn the Base Cover clockwise. When you hear a click, the Base is successfully locked.

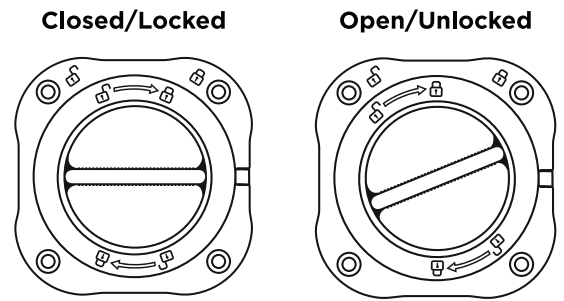

Connecting The Adapters
1. Open the Lever of the Air Chuck and insert the threaded end of the Adapter.
* Do **NOT** overtighten the Adapter.

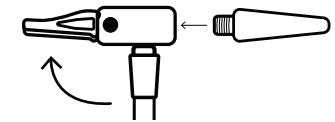

2. Close the Lever to secure the Adapter in the Air Chuck.

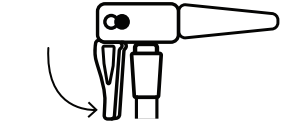

Using The Air Pump
1. Power on the NEVERGOFLAT™, adjust the modes, uncoil the air hose and attached air chuck from its housing, and attach the air chuck to your inflatable. Attach an Adapter if necessary.
2. Press and hold the AIR button for 2 seconds to activate the air compressor. The Blue LED Ring Light will breathe at a fast pace while the unit is in use.
3. The air compressor will automatically shut off once the preset PSI/BAR/kPa level has been met.
* Press the AIR button to manually turn off the air compressor at any time.

Notes:
When using the air compressor for extended periods of time, it is recommended to allow the unit to cool after 8 minutes has surpassed to prevent over-heating. Always refer to the manufacturer’s recommended PSI/BAR/kPa level for the item being inflated.

Built-In Protection Codes
E01 | Protection Type: Battery Over-Temperature Protection
Troubleshooting: Turn off the NEVERGOFLAT™ and allow 10 minutes to cool down.

E02 | Protection Type: Motor Over-Temperature Protection
Troubleshooting: Turn off the NEVERGOFLAT™ and allow 10 minutes to cool down.

E03 | Protection Type: Leakage Protection
Troubleshooting: Disconnect and reconnect the Air Hose.

Checking Tire Pressure
1. With the Lever open, connect the Air Chuck to the tire’s air valve.
2. Close the Lever to secure it on the tire’s air valve. The NEVERGOFLAT™ will read the tire’s current PSI and show the result on the digital display.

Using The Flashlight
1. Press the LED button once to turn on the Flashlight.
A. Continuously press the LED button to cycle through the flashlight modes.
B. Press and hold the LED button for 2 seconds to turn off the Flashlight without cycling through the light modes.
Modes: On | S.O.S. | Strobe
* 25 Lumens

Using The Emergency Floodlight
1. Press the FLOOD LAMP button once to turn on the Floodlight.
A. Continuously press the FLOOD LAMP button to cycle through the light modes.
B. To turn off, cycle through the light modes or press and hold the FLOOD LAMP button for 2 seconds.
Modes: On | Red & White Flashing | White Flashing | Red Flashing
* 150 Lumens for White
* 48 Lumens for Red

Recharging The NEVERGOFLAT™
1. Plug the included 1-Port USB Car Charger into a vehicle’s 12V outlet.
2. Plug the included 24” Type-C to USB Charging Cable into the 1-Port USB Car Charger and into the Type-C input on the NEVERGOFLAT™.
3. The NEVERGOFLAT™ will begin to charge showing the battery indicator level on the digital display. The Blue ring light will breathe at a slow pace.
* The 24” Type-C to USB Charging Cable can be used with any USB power source to recharge the NEVERGOFLAT™.

Using The Power Bank
Plug a USB cable into the USB Charging Port and into a device. Press button AIR ON/OFF, and then the device will begin to charge.

To view the complete user manual and additional usage warnings, please visit:

